VEGA TEO-5 elektronischer Theodolit



Angebotsdetails

Artikelname:	VEGA TEO-5 elektronischer Theodolit
Artikel Nr.:	26002-2195
Hersteller:	VEGA
Typ:	TEO-5
Artikelzustand:	funktionsfähig
Standort:	Deutschland, 89150 Laichingen
Verfügbarkeit:	sofort

Beschreibung

Elektronischer Theodolit VEGA TEO-5, Seriennummer 56949, Inventarnummer 00166, mit Digitalanzeige, Dreifuß, Netzteil, Lotstab, Abdeckhaube und Bedienungsanleitung im Transportkoffer.

Technische Details

Abmessungen (LxBxH) ca.:	450 x 350 x 250 mm
Gewicht ca.:	8 kg

Zahlungs- und Lieferbedingungen

Lieferbedingungen:	Ab Fundament
Zahlungsbedingungen:	nach Vereinbarung

Nettopreis

Auktionsartikel

Ihr Ansprechpartner

Huy Trinh

Telefon:	+49 2196 7050573
Mobil:	+49 173 6172616
E-Mail:	htr@re-mach.com













ReMach GmbH
Burger Str. 28
D-42929 Wermelskirchen
Deutschland

Geschäftsführung
Oscar Soler Monte
Huy Trinh
www.re-mach.com

Firmenregister
Nummer: HRB 125496
Amtsgericht Köln
Deutschland
Steuer Nr.: 2710808308
Ust-ID: DE458213740

Bankverbindung
Kontoinhaber: ReMach GmbH
Bankname: GENO BANK ESSEN eG
BIC: GENODEM1GBE
IBAN: DE35 3606 0488 0139 4646 00




TEO-5



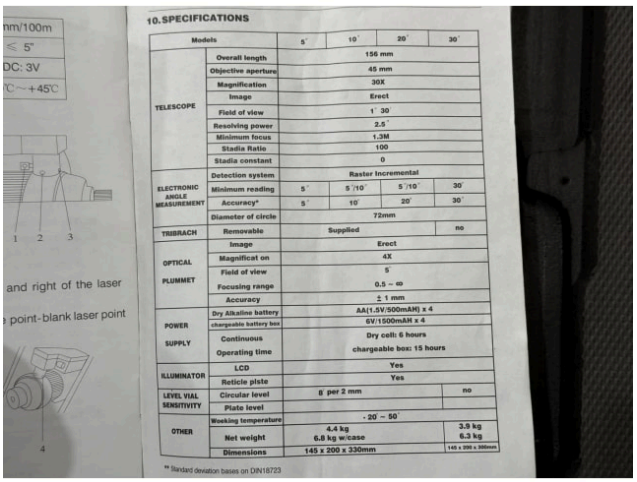
10.SPECIFICATIONS
Models
5"
10"
20"
30"
TELESCOPE
Overall length
156 mm
Objective aperture
45 mm
Magnification
30X
Image
Erect
Field of view
1° 30'
Resolving power
2.5"
Minimum focus
1.3M
Stadia Ratio
100
Stadia constant
0
ELECTRONIC ANGLE MEASUREMENT
Detection system
Raster Incremental
Minimum reading
5"
5"/10"
5"/10"
30"
Accuracy*
5"
10"
20"
30"
Diameter of circle
72mm
TRIBRACH
Removable
Supplied
no
OPTICAL PLUMMET
Image
Erect
Magnificat on
4X
Field of view
5°
Focusing range
0.5 ~ ∞
Accuracy
± 1 mm
POWER SUPPLY
Dry Alkaline battery
AA(1.5V/500mAH) x 4
chargeable battery box
6V/1500mAH x 4
Continuous Operating time
Dry cell: 6 hours
chargeable box: 15 hours
ILLUMINATOR
LCD
Yes
Reticle plate
Yes
LEVEL VIAL SENSITIVITY
Circular level
8' per 2 mm
no
Plate level
OTHER
Working temperature
- 20° ~ 50°
Net weight
4.4 kg
6.8 kg w/case
3.9 kg
6.3 kg
Dimensions
145 x 200 x 330mm
145 x 200 x 305mm
** Standard deviation bases on DIN18723
and right of the laser
point-blank laser point